


## Gold Series 5th Generation Specifications

Model	Gold 100	Gold 200	Gold 300	Gold C250	Gold FX
System Format	2-way	3-way	3-way	3-way	2-way
Frequency Response (-6dB)	40 Hz – 50 kHz	35 Hz – 50 kHz	30 Hz – 50 kHz	40 Hz – 50 kHz	60 Hz – 50 kHz
Sensitivity dB (1W@1M)	86 dB	88 dB	90 dB	88 dB	86 dB
Nominal Impedance (Ohms)	4 Ohms	4 Ohms	4 Ohms	4 Ohms	4 Ohms
Minimum Impedance	2.8 Ohms @ 3.4 kHz	3.4 Ohms @ 1 kHz	3.5 Ohms @ 1 kHz	2.8 Ohms @ 3.7 kHz	3.7 Ohms @ 3 kHz
Maximum SPL (dBA)	110 dBA (Pair)	114 dBA (Pair)	117 dBA (Pair)	111 dBA (each)	109 dBA (Pair)
Power Handling (RMS) (watts)	120 W	200 W	250 W	200 W	100 W
Recommended Amplifier Requirements (watts)	60 – 120 W	80 – 200 W	100 – 250 W	80 – 200 W	30 – 100 W
Bass Alignment	Bass Reflex. HiVe II port system	Bass Reflex Dual HiVe II port system	Bass Reflex Dual HiVe II port system	Sealed cabinet	Sealed cabinet
Crossover Frequency	2.5 kHz	L.F/ M.F: 650 Hz M.F/ H.F: 3.5 kHz	L.F/ M.F: 650 Hz M.F/ H.F: 3 kHz	L.F/ M.F: 1.2 kHz M.F/ H.F: 4 kHz	2.5 kHz
Drive Unit Complement	1 x 6 <sup>1/2</sup> " RDT II long-throw bass driver 1 x MPD high frequency transducer	2 x 6 <sup>1/2</sup> " RDT II long-throw bass drivers 1 x 2 <sup>1/2</sup> " C-CAM mid-range driver 1 x MPD high frequency transducer	2 x 8" RDT II long-throw bass drivers 1 x 2 <sup>1/2</sup> " C-CAM mid-range driver 1 x MPD high frequency transducer	2 x 6 <sup>1/2</sup> " RDT II long-throw bass drivers 1 x 2 <sup>1/2</sup> " C-CAM mid-range driver 1 x MPD high frequency transducer	2 x 4" C-CAM bass/mid driver 2 x MPD high frequency transducer
External Dimensions (Including Grille and Terminals (H x W x D))	360 x 195 x 330.6 mm 14 <sup>3/16</sup> x 7 <sup>11/16</sup> x 13"	950 x 195 x 330.6 mm 37 <sup>3/8</sup> x 7 <sup>11/16</sup> x 13"	1000 x 240 x 360.6 mm 39 <sup>3/8</sup> x 9 <sup>7/16</sup> x 14 <sup>3/16</sup> "	205 x 537 x 330.6 mm 8 <sup>1/16</sup> x 21 <sup>1/8</sup> x 13"	270 x 341.8 x 160 mm 10 <sup>5/8</sup> x 13 <sup>7/16</sup> x 6 <sup>5/16</sup> "
External Dimensions (Including Outrigger Feet and Spikes (H x W x D))	N/A	997 x 282.8 x 387.8 mm 39 <sup>1/4</sup> x 11 <sup>1/8</sup> x 15 <sup>1/4</sup> "	1047 x 327.8 x 417.8 mm 41 <sup>1/4</sup> x 12 <sup>7/8</sup> x 16 <sup>7/16</sup> "	N/A	N/A
Weight (each)	9.12 kg 20 lb 2 oz	21.86 kg 48 lb 2 oz	30.56 kg 67 lb 4 oz	14.48 kg 31 lb 14 oz	6.2 kg 13 lb 10 oz
Finishes	Satin White, Dark Walnut, Piano Ebony, Piano Gloss Black				

Model	STAND (For use with Gold 100)
External Dimensions (H x W x D)	605.5 x 296.2 x 324.7 mm 23 <sup>13/16</sup> x 11 <sup>11/16</sup> x 12 <sup>13/16</sup> "
External Dimensions (Including Spikes (H x W x D))	625.5 x 296.2 x 324.7 mm 24 <sup>5/8</sup> x 11 <sup>11/16</sup> x 12 <sup>13/16</sup> "
Finishes	Black, White

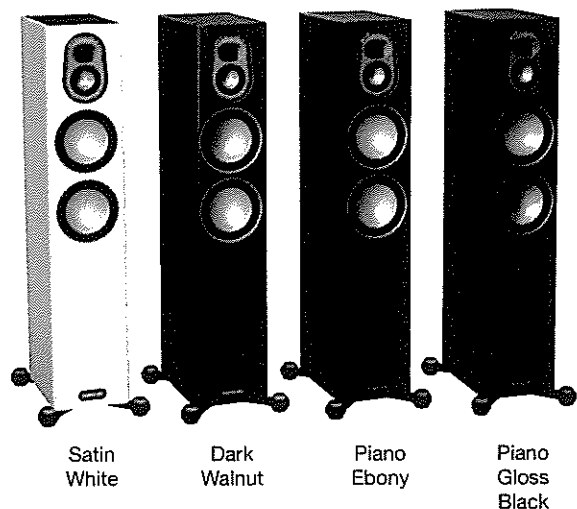

Satin White

Dark Walnut

Piano Ebony

Piano Gloss Black